

ENGRAVING MACHINE

IS200



GRAVOGRAPH 

IS200


IDEAL FOR

- PERSONALIZATION OF SMALL OBJECTS
- BADGES, PLAQUES
- PART MARKING
- SMALL INDUSTRIAL SIGNAGE
- NAME PLATES
- FLAT AND CYLINDRICAL ENGRAVING (WITH IS200TX)

- **Reliability and quality** of engraving. IS200 benefits from Gravograph's high standards of manufacture.
- Connected to a computer, it is totally **compatible** with any PC graphics software generating HPGL files.
- Work area is clear for **easy access to the object** to be engraved.
- **Very quiet** spindle motor with direct current.
- A complete range of spindles, clamping accessories and tools **to suit the evolution of applications.**
- Gravograph's software **GravoStyle** allows you to create and carry out your work on IS200 with efficiency.

IS200TX

- The specific version of IS200 is suitable for flat and cylindrical engraving.
- 3"x10" engraving area (80x225 mm) on items up to 8" (210 mm) high and for cylinders up to 7.5" (200 mm) diameter, at ±59°F (±15°C).
- The standard IS200 can move into IS200 TX thanks to an adaptation kit.

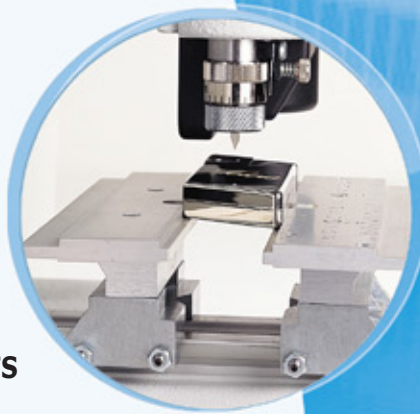

Mechanical characteristics

■ X & Y axes:

Engraving area covered in one pass:
3"x10" (80 x 225 mm)
Flatness tolerance: 0.008" (0.2 mm)
Maximum clearance in X between columns:
12" (300 mm)
Maximum clearance in Y axis: unlimited

■ Z Axis:

Spindle travel: 3" (75 mm)
Spindle travel at bottom of vice: 2" (48 mm)

■ Spindle:

Tool diameter: 0.17" (4.36 mm)
Rotation speed: 17000 tr/min
Direct current mechanical power

■ Clamping systems:

Vice: concentric holding
Max. opening of vice: 4" (100 mm)
Height of vice jaws: 1.5" (34 mm)

■ Net weight:

- IS200 : 44 lb (20 kg)
- IS200TX : 99 lb (45 kg)

■ Noise level:

Empty*: LA eq dB (A) <60±1
When engraving*: LA eq dB (A) 81±2
Peak when engraving*: Lp Cpeak dB (C): 105

* in accordance with Gravograph standards

■ Optional accessories:

- 0.59" (15 mm) diameter pen vice
- Jewellery vice and prehension jigs
- Range of spindles and depth regulating noses
- Divider vice for cylinders with max. diameter 8" (200 mm)
- Range of mandrel and cones for cylinder prehension



GRAVOGRAPH 

A trademark of GravoTech Marking

GravoTech Marking SAS

56, avenue Jean Jaures
10600 La Chapelle Saint Luc -FRANCE
Tél : +33 325 416 726
Fax : +33 325 742 266
information@gravograph.com
www.gravograph.com